Tersus GNSS AX4E07 High Performance Antenna

Overview

The AX4E07 high performance GNSS antenna is designed with rugged housing, high reliability and easy integration for applications that require ultimate accuracy. It offers full support for reliable and consistent satellite signals tracking, including GPS, GLONASS, Galileo, BeiDou, QZSS, IRNSS, SBAS as well as L-Band correction service. It is ideal for unmanned vehicles, autonomous driving, mobile mapping system and solution of mobile laser scanning system for unmanned vehicles or applications where precision matters.



Key Features

- ✓ Supports multiple constellations and frequencies
 - GPS L1, L2, L5
 - GLONASS L1, L2, L3
 - BeiDou B1, B2, B3
 - Galileo E1, E5a, E5b, E6
 - QZSS L1, L2, L3, L6
 - IRNSS L5
 - SBAS L1, L5
 - L-Band
- Reliable phase center, low elevation signal tracking, strong anti-interference performance
- ✓ Low profile, rugged IP67 housing idea for harsh environments
- ✓ Weight 250g only, low power consumption, autonomous vehicle mounting

Right to the Point -----

Tersus GNSS

AX4E07 Antenna

Technical Specifications

Performance

Signal Tracking:

GPS L1, L2, L5; GLONASS L1, L2, L3; BDS B1, B2, B3; Galileo E1, E5a, E5b, E6; QZSS L1, L2, L3, L6; IRNSS L5; SBAS L1, L5: L-Band

Nominal Impedance:

50Ω

Polarization:

RHCP

Axial Ratio: ≤3dB

Peak Gain:

4.0dBi

Azimuth Coverage:

directional)

Mechanical



LNA

LNA Gain: 40±2dB

101LGD

Noise Figure:

≤2dB

Output VSWR:

≤2.0

Passband Ripple:

±2dB

Operation Voltage:

3.3V~16V DC

Operation Current: ≤ 45mA

Differential Propagation Delay:

≤ 5n


EMC(RF Input Static):

Connected 8KV, Air 15KV,

10time

Environmental



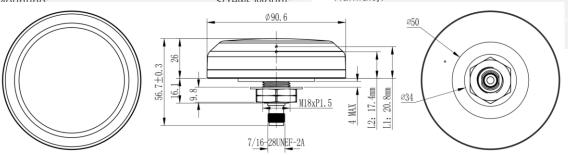

360°(Omni-

TOP VIEW SIDE VIEW BOTTOM VIEW

Undeclared Tolerance: ±0.3mm

Website: www.tersus-gnss.com
Sales Inquiry: sales@tersus-gnss.com
Technical Support: support@tersus-gnss.com

Information is subject to change without notice. © Copyright 2023 Tersus GNSS Inc.