

TERSUS

AG992-PRO

AUTO-STEERING SYSTEM

THE NEW-GENERATION PRECISION AG TECHNOLOGY



THREE MAIN PARTS

The TERSUS AG992-Pro Auto Steering System is a high precision automatic steering system which works with TERSUS latest TAP service. With TAP, the auto steering system will not need to work with the local RTK base station or CORS, but directly receives corrections broadcast by the satellites.

The system integrates the advantage of easy installation, large torque, high precision, low noise, low heat and quick debugging. It is compatible with 95% tractors and can be widely used for different field works like harrowing, sowing, spraying and harvesting.



Electric Steering Wheel

Compatible with mainstream Tractors

Size
Supply voltage
IP Rating

410mm
6V~18V DC
IP65



Control Terminal

10.1" touch screen; Built-in WiFi, Bluetooth;
Displays real-time task status

Size
Screen
Power
Operating and Storage temperature
IP Rating

281x181x42mm
10.1" Capacitive Touch Screen,
9V~36V DC
-40 °C~+70 °C
-45 °C~+80 °C
IP67



GNSS Antenna

Modular design;
Obtains position, orientation transmits the
info to the control terminal

Frequencies
Size
Operating and Storage temperature
IP Rating

GPS; GLONASS; BeiDou; Galileo;
QZSS; SBAS; IRNSS; L-Band
152x62.2mm
-40 °C~+85 °C
-55 °C~+85 °C
IP67

FEATURES



Supports multiple constellations and frequencies

GPS; GLONASS; BeiDou support BDS-3; Galileo; QZSS; SBAS supports
WAAS, EGNOS, GAGAN, SDCM, MSAS; L-band



Auto-steering error less than 2.5cm



Simple & Fast installation




Satellite-based PPP service (Tersus TAP)



Easy & Quick calibration procedures

10.1" touch screen control terminal

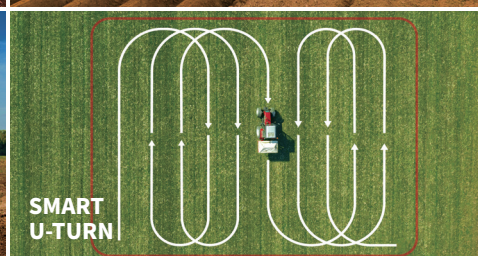

AG992-PRO TERSUS TAP (PPP) SERVICE

TERSUS TAP

TAP is a satellite-based precise point positioning service developed by Tersus GNSS, which allows users to achieve centimeter-level high-precision positioning worldwide.



High-performance global solution

Enjoy 15mm horizontal and 30mm vertical accuracy in just 3 minutes worldwide.

High-availability & Redundancy

With redundant backups for all hardware and broadcast paths, ensure over 99.99% service availability.

The security and simplicity

Quick and secure access, with one-way data transfer of corrections to your receiver.

Seamless subscriptions

Remote one-click activation, with flexible subscription durations to suit your application needs.





Real-time via L-band from satellite



Global coverage




Stable coordinate frame

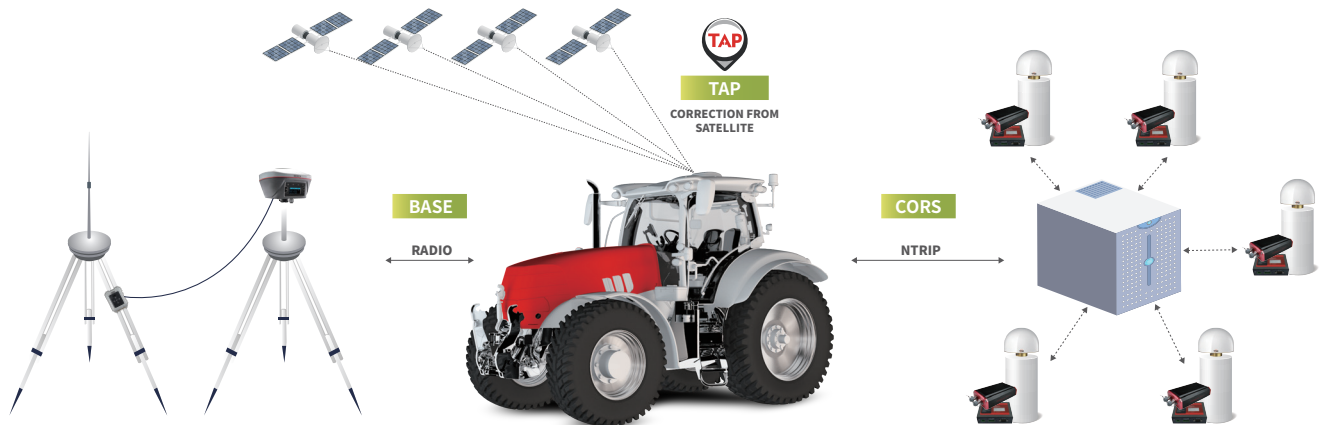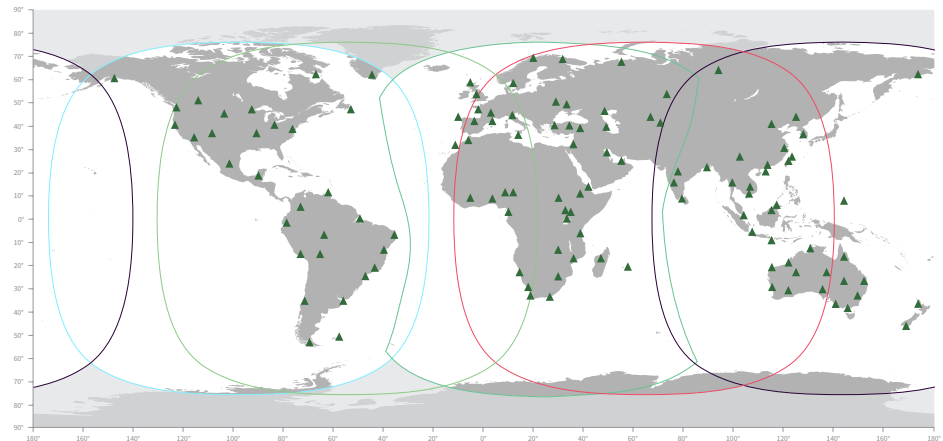

APPLICATION SCENARIO



HARROWING

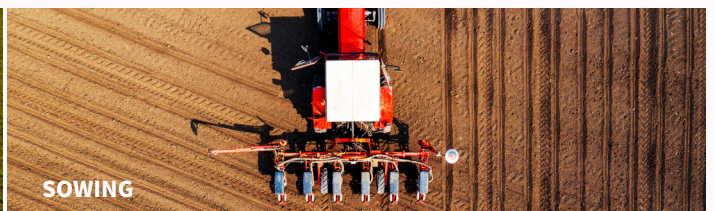

SOWING



SPRAYING



HARVESTING

TECHNICAL SPECIFICATIONS



AG992-PRO

T100 Control Tablet

System

Operating System: Android 6.0 / 9.0
LCD: 10.1" Capacitive Touch Screen

Electrical & Physical

Power Input: 9V~36V DC
Dustproof & Waterproof: IP-67
Dimension: 281mmx181mmx42mm
Weight: 1.36kg

EMS5 Motor Wheel

Motor Performance

Rated torque: 10 N·m (typical)
Supply voltage: 6V~18V DC

Physical

Dimension: ϕ 178x81mm (Motor)
 ϕ 410x32mm (Steering Wheel)
Weight: 5.25kg (Motor only)
6.35kg (Motor and Wheel)

David30-TAP GNSS Receiver

Performance

Frequencies: GPS; GLONASS; BeiDou(supports BDS-3); Galileo; QZSS; SBAS; L-band
Real Time Kinematic, RTK (RMS):
Horizontal: 8mm+1ppm
Vertical: 15mm+1ppm
Timing Accuracy (RMS): 20ns
Velocity Accuracy (RMS): 0.03m/s
TAP positioning accuracy (RMS): <2.5cm
TAP convergence time: 3 minutes
TAP coverage: Global
TAP signal stability: 99.99%
Initialization reliability: >99.99%

Electrical & Physical

Input voltage: 5 ~ 36V DC
Power consumption: 3.6W (typical)
Dimension: 124x79.5x37mm
Weight: \approx 360g
Dustproof & Waterproof: IP-67



LinkedIn



Facebook



Twitter



YouTube

To learn more, please visit: www.tersus-gnss.com
Sales inquiry: sales@tersus-gnss.com
Technical support: support@tersus-gnss.com

Tersus GNSS reserves the right to change specification.
©2025 Tersus GNSS Inc. All rights reserved.

Global Headquarter

Tersus GNSS Australia
Level 2, 990 Whitehorse Rd, Box Hill,
VIC 3128, Australia
+61 3 9018 5598

US Office

Tersus GNSS United States
809 San Antonio Rd, Suite 10,
Palo Alto CA 94303-4634,
United States
+1 4158 0048 00

China Office

Tersus GNSS China
No.666 Zhangheng Road,
Pudong Shanghai 201203,
PR China
+86 21-5080 3061